




## Type sheet

### Deflagration and endurance burning proof pressure relief valve KITO® DS/KS-IIB1-...





#### Application

As an end-of-line flame arrester, explosion and endurance burning proof for all inflammable liquids and vapors of explosion group IIB1 and also for alcohols with a maximum experimental safe gap (MESG)  $\geq 0.85$  mm and an maximum operating temperature of 60 °C. Safety valve for out breathing pipes of storage tanks as a protection against overpressure. By appropriate pressure adjustment the gasification losses of the storage product are prevented or strongly limited. Usually mounted on the top of the tank in conjunction with a vacuum relief valve (see KITO® VS/KS-IIB3-... (type sheet D 11 N)). An explosion proof condensate drain is also available for this model at extra cost.

*With additional examination and approval, applicable also for alcohols (ethanol, methanol...)*

#### Dimensions (mm) and settings (mbar)

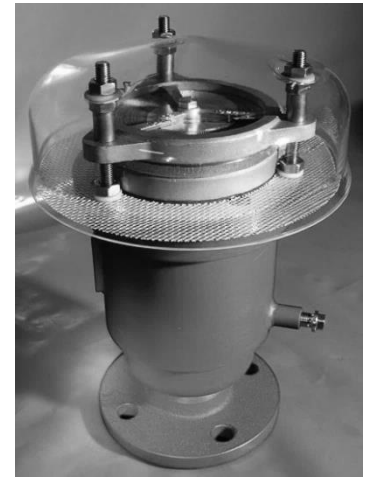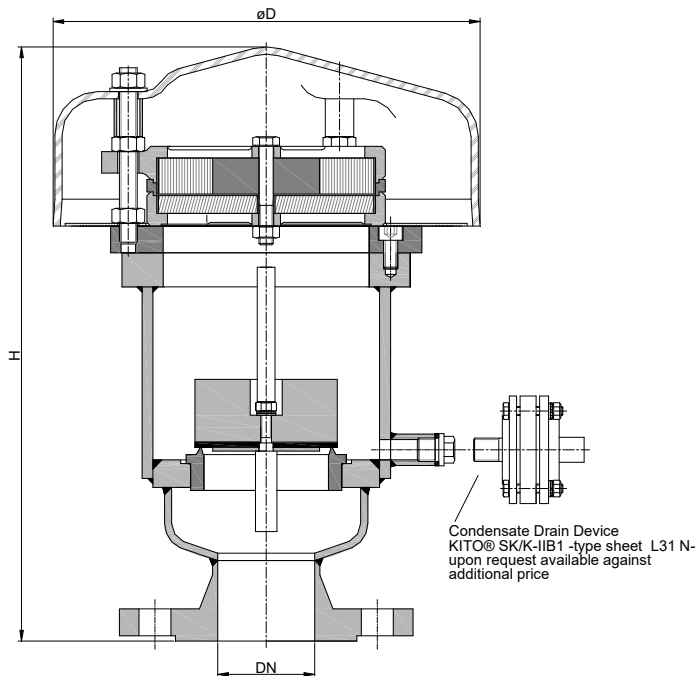

DN		D	H		~ kg	min. - max. (load weight from PE)	setting	
DIN	ASME		DIN	ASME			min. - max.	min. - max. (with housing extension)
25 PN 40	1"	240	324	340		3,1 - 10.4	10,5 - 200	-
50 PN 16	2"		332	351				
80 PN 16	3"		383	403				
100 PN 16	4"		381	406				


Indicated weights are understood without weight load and refer to the standard design  
Higher settings on request !

#### Example for order

**KITO® DS/KS-IIB1-50**  
(design with flange connection DN 50 PN 16)

**Type examination certificate to EN ISO 16852 and CE-marking in accordance to ATEX-Directive 2014/34/EU**

**Type sheet**

 Deflagration and endurance burning proof pressure relief valve  
**KITO® DS/KS-IIB1-...**

**Design**

	standard	optionally
housing	steel	stainless steel mat. no. 1.4571
valve seat, valve spindle	stainless steel mat. no. 1.4571	
load weight	stainless steel mat. no. 1.4571	PE
valve sealing	NBR	Viton, PTFE, EPDM, metal sealing
	≥ 100 mbar only PTFE or metal sealing	
KITO®-flame arrester element	completely interchangeable	
KITO®-casing / KITO®-grid	stainless steel mat. no. 1.4408 / 1.4310	stainless steel mat. no. 1.4408 / 1.4571
weather hood	PMMA	
protective screen	PA6	
flange connection	EN 1092-1 type B1	ASME B16.5 Class 150 RF

**Performance curves**

Flow capacity  $V$  based on air of a density  $\rho = 1.29 \text{ kg/m}^3$  at  $T = 273 \text{ K}$  and atmospheric pressure  $p = 1.013 \text{ mbar}$ . For other gases the flow can be approximately calculated by

$$\dot{V}_{40\%} = \dot{V}_b \cdot \sqrt{\frac{\rho_b}{1.29}} \quad \text{or} \quad \dot{V}_b = \dot{V}_{40\%} \cdot \sqrt{\frac{1.29}{\rho_b}}$$

The indicated flow rates will be reached by an accumulation of 40% above valve's setting (see DIN 4119).  
 If the allowable overpressure is less 40%, please consult der factory for the corrected volume flow.

